




TILT BED TRAILERS

2600kg 3000kg 3500kg GVW

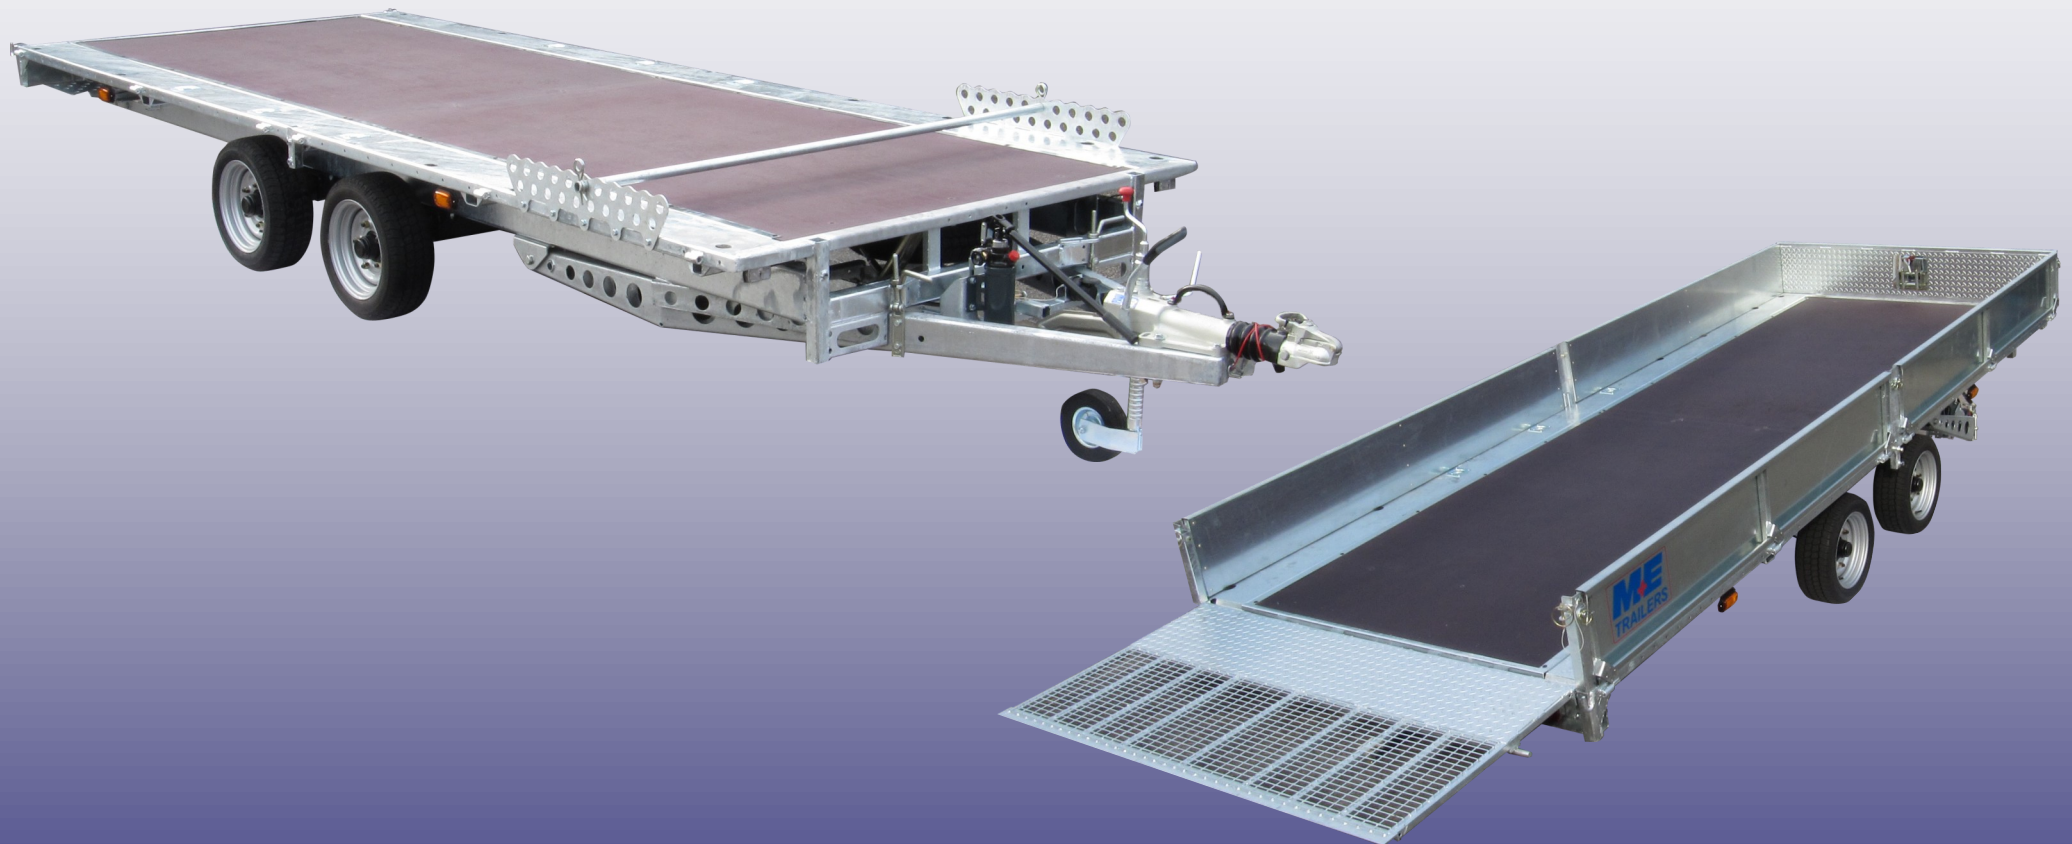

Designed and manufactured in the UK, the Tilt Bed Trailer range comes loaded with a host of benefits, including:

3' Full Width Loading Ramp, with Gas Assistance, or a Pair of Individual Skids, (storage provided for 4)

Integral Lashing Points and Deck Rings, Spare Wheel mounted under the Floor, Locking 50mm Ball Coupling, Heavy duty Jockey Wheel.

All trailers shown with various options, please see over for details

FEATURES

The Tilt Bed Trailer Chassis is fitted with M+E manufactured heavy duty, low maintenance rubber torsion axles.

The suspension has been proven in the Construction Plant industry and it has excellent ride characteristics to cope with operation in both laden and unladen conditions.

The Tilt Bed Platform has an 18mm Plywood central floor flanked by steel runways, giving a truly flat deck with integral lashing points and deck rings, making these trailers suitable for the transportation of a wide range of on- and off-road cars and construction plant plus the day to day duties of a flat bed trailer.

Loading is via the full width 3' ramp, with gas assist, or by individual skids which are stowed securely and quietly underneath the platform. A total of 4 skids can be carried. The low platform height and reduced loading angle of only 12° makes for a versatile multi purpose trailer.


The loading platform is further enhanced by having the spare wheel with 195/50 R 13C tyre and the hydraulic cylinder safely mounted under the floor.

A Maintenance Safety Prop is provided for use when the platform is raised, for access to the under floor area.

The trailers are fitted with full EC approved lighting system, including LED side marker lights, reversing lights and 13 Pin Electric Plug, with a converter for 7 Pin.

Low mounted HD Winch with professional roller box for offset loading

MTB3516T2 Trailer with Heavy Duty Winch, & Headboard & Sides Options

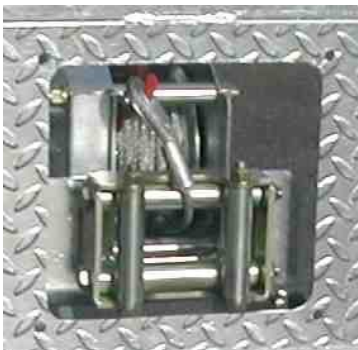

Dimensions & Weights are given as a guide only. We reserve the right to alter specifications without notice

TILT BED TRAILERS—STANDARD SPECIFICATION


	MTB2616T2	MTB3016T2	MTB3516T2
MAXIMUM GROSS WEIGHT kg	2600	3000	3500
UNLADEN WEIGHT kg with SKIDS (Pair)	795	800	870
OVERALL LENGTH / WIDTH	6405mm (21') / 2055mm (6' 9")		
PLATFORM LENGTH	5064mm (16' 6")		
WIDTH mm	1992mm (6' 6")		
HEIGHT OF SIDES mm	380mm (15")		
TYRE SIZE	195/50 R 13 C 4 Stud	195/50 R 13 C 4 Stud	195/50 R 13 C 5 Stud



Trailer with Full Width 3' Ramp with Gas Assist, with optional Headboard & Sides Kit



Trailer with Removable Skids Option

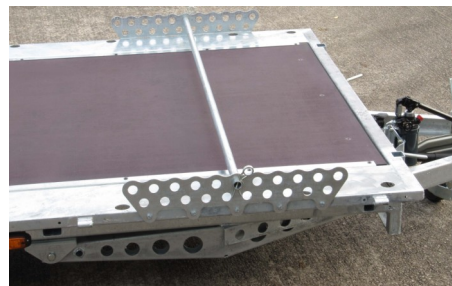

Trailer shown with Load Positioning Kit

ME **MEREDITH AND EYRE**

TRAILERS • AXLES • COUPLINGS • CHASSIS

Broadway Industrial Estate, Hyde, SK14 4QF Tel: 0161 368 6414 Fax: 0161 367 8702

Email: enquiries@meredithandeyre.co.uk Web: www.meredithandeyre.co.uk