

Solid Beam Axles

TYPE	CAPACITY KG	A	B	C	PCD
UNBRAKED					
MBA40505	750	To Customer Specification		40	9
MBA401345	750			40	2 9
MBA401443	750			40	1 2 3 8
MBA451263	750—1500			45	1 3 4 5 6 10
MBA501263	750—1500			50	1 3 4 5 6 10
MBA50250UB	750—1800			50	4 5 6
MBA60250UB	750—2500			60	4 5 6
MBA65751	750—4000			65	6 7
MBA70751	750—5000			70	6 7
BRAKED (AUTO-REVERSE OR STANDARD)					
MBA40160	750—900	To Customer Specification		40	9
MBA40203	750—900			40	1 2 3 8
MBA45203	1300—2000			45	1 3 4 5 6 10
MBA45200	1500—2000			45	1 3 4 5 6 10
MBA50200	1500—2000			50	1 3 4 5 6 10
MBA50250	1800—2300			50	4 5 6
MBA60250	1800—2500			60	4 5 6
MBA65300	3000—4000			65	6 7
MBA70300	3000—5000			70	6 7


STANDARD WHEEL STUD PATTERNS			
1	4 x 1/2" on 5 1/2" PCD	6	5 x 5/8" on 6 1/2" PCD
2	4 x M12 on 100mm PCD	7	6 x M18 on 205mm PCD
3	5 x 1/2" on 4 1/2" PCD	8	4 x M12 on 98mm PCD
4	5 x 1/2" on 6" PCD	9	4 x 3/8" on 4" PCD
5	5 x M14 on 140mm PCD	10	5 x M12 on 112mm PCD

Unbraked Axles are not permitted on Road Trailers above 750kg Gross Trailer Weight.


Braked Axles are fitted with EU Approved Brakes

Stub Axles are also available, in Round or Square Bar

For Off Road applications, please contact our Technical Sales Department

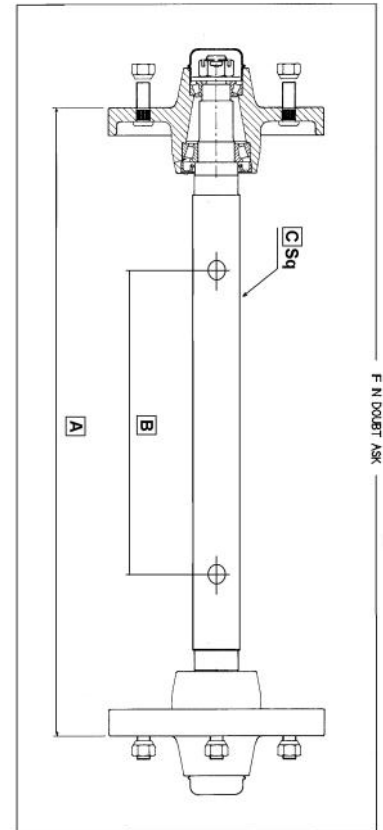

IF IN DOUBT ASK

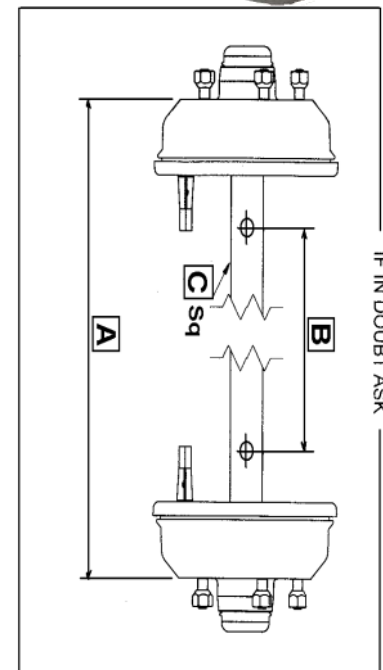

IF IN DOUBT ASK